



**NAGAKI**



*Since 1946*

# WIRE GRIP

## ORIGINAL GRIP

### MINI-GRIP W/L

0.5 ton

: Steel Rod, Barbed Wire, Messenger Wire



<The actual product comes with a safety latch>

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
MINI-GRIP W/L	51001A	5kN/0.5ton	1mm	10mm	16mm	0.3kg

### SD-L-GRIP W/L

1ton

: Bare Copper Cable, Wire Rope, Messenger Wire



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
SD-L-GRIP W/L	51054	10kN/1.0ton	2.6mm	15mm	26mm	0.7kg
SD-GRIP W/L	51051	10kN/1.0ton	2.6mm	15mm	16mm	0.7kg

### MESSEN-L-GRIP W/L

1ton

: Bare Copper Cable, Messenger Wire, Guy Wire



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
MESSEN-L-GRIP W/L	51055	10kN/1.0ton	4mm	12mm	26mm	0.7kg

### MESSEN-L-GRIP-L W/L

1ton

: Aluminum Clad Steel Conductor



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
MESSEN-L-GRIP-L W/L	51055L	10kN/1.0ton	4mm	12mm	26mm	0.9kg

### 1TON-L-GRIP W/L

1ton

: Bare Copper Cable, Messenger Wire



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
1TON-L-GRIP W/L	51042	10kN/1.0ton	4mm	22mm	32mm	1.4kg
1TON-GRIP W/L	51044	10kN/1.0ton	4mm	22mm	17mm	1.4kg

### 1TON-A-GRIP W/L

1ton

### 2TON-A-GRIP W/L

2ton

: Guy Wire, Wire Rope, Messenger Wire



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
1TON-A-GRIP W/L	51110	10kN/1.0ton	4mm	22mm	32mm	1.3kg
2TON-A-GRIP W/L	51109	20kN/2.0ton	4mm	22mm	32mm	1.4kg

### 2TON-L-GRIP W/L

2ton

: Bare Copper Cable, Messenger Wire



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
2TON-L-GRIP W/L	51041	20kN/2.0ton	4mm	22mm	32mm	1.5kg
2TON-GRIP W/L	51047	20kN/2.0ton	4mm	22mm	17mm	1.5kg
2TON-GRIP-L W/L	51096	20kN/2.0ton	4mm	22mm	32mm	1.7kg

### 2TON-W-GRIP W/L

2ton

: Bare Copper Cable, Messenger Wire, Wire Rope, Trolley Cable



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
2TON-W-GRIP W/L	51058	20kN/2.0ton	5mm	16mm	32mm	1.8kg
2TON-W-GRIP T2 W/L	51019	20kN/2.0ton	8mm	20mm	25mm	3.1kg

### MIDDLE-L-GRIP W/L 2ton

: Bare Copper Cable, Covered Conductor



MIDDLE-L-GRIP W/L



MIDDLE-GRIP W/L



MIDDLE-L-GRIP-L W/L

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
MIDDLE-L-GRIP W/L	51059	20kN/2.0ton	5mm	25mm	32mm	1.8kg
MIDDLE-GRIP W/L	51053	20kN/2.0ton	5mm	25mm	20mm	1.8kg
MIDDLE-L-GRIP-L W/L	51095	20kN/2.0ton	5mm	25mm	32mm	2.3kg

### LARGE-L-GRIP W/L 2ton

: Bare Copper Cable, Covered Conductor



LARGE-L-GRIP W/L



LARGE-GRIP W/L

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
LARGE-L-GRIP W/L	51056	20kN/2.0ton	16mm	32mm	32mm	2.1kg
LARGE-GRIP W/L	51048	20kN/2.0ton	16mm	32mm	20mm	2.1kg

### 3TON-GRIP W/L 3ton

: Bare Copper Cable, Messenger Wire, Trolley Cable, Wire Rope



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
3TON-GRIP W/L	51045	30kN/3.0ton	8mm	22mm	35mm	3.1kg

### 4TON-GRIP W/L 4ton

: Bare Copper Cable, Messenger Wire, Trolley Cable, Wire Rope



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
4TON-GRIP W/L	51018	40kN/4.0ton	13mm	28mm	25mm	5.0kg

### 4TON-GRIP W/L LARGE EYE 4ton

: Bare Copper Cable, Messenger Wire, Trolley Cable, Wire Rope



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
4TON-GRIP W/L	51018A	40kN/4.0ton	13mm	28mm	50mm	5.0kg

### 6TON-GRIP W/L 6ton

: Bare Copper Cable, Messenger Wire, Trolley Cable, Wire Rope



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
6TON-GRIP W/L	51081	60kN/6.0ton	13mm	28mm	25mm	5.2kg

### 10TON-GRIP W/L 10ton

: Messenger Wire




Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
10TON-GRIP W/L	51052	100kN/10.0ton	18mm	32mm	66mm	10kg

# WIRE GRIP

## FOR BARE ALUMINUM CABLE

AL-L-GRIP W/L

1ton

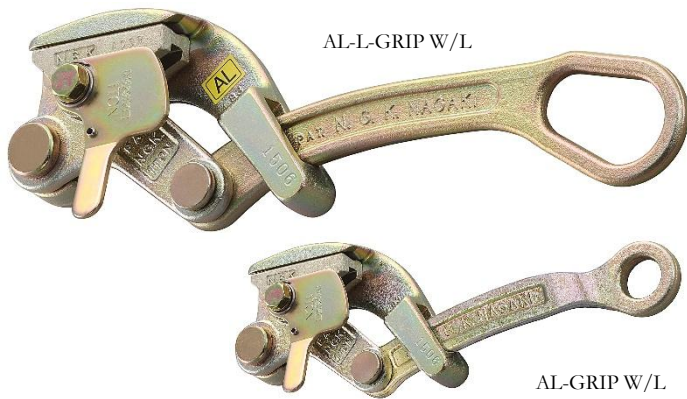

AL-L-GRIP W/L

AL-GRIP W/L

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
AL-L-GRIP W/L	51046	10kN/1.0ton	5mm	22mm	32mm	1.4kg
AL-GRIP W/L	51043	10kN/1.0ton	5mm	22mm	17mm	1.4kg

AL-2TON-GRIP W/L

2ton

AL-2TON-GRIP-L W/L



AL-2TON-GRIP W/L

AL-2TON-GRIP-L W/L

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
AL-2TON-GRIP W/L	51078	20kN/2.0ton	5mm	16mm	32mm	1.7kg
AL-2TON-GRIP-L W/L	51078A	20kN/2.0ton	5mm	20mm	32mm	2.3kg

AL-MIDDLE-GRIP W/L

2ton

AL-MIDDLE-GRIP-L W/L



AL-MIDDLE-GRIP W/L

AL-MIDDLE-GRIP-L W/L

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
AL-MIDDLE-GRIP W/L	51057	20kN/2.0ton	5mm	25mm	32mm	2.3kg
AL-MIDDLE-GRIP-L W/L	51086	20kN/2.0ton	5mm	25mm	32mm	2.8kg

AL-LARGE-GRIP W/L

2ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
AL-LARGE-GRIP W/L	51040	20kN/2.0ton	16mm	32mm	32mm	2.3kg

AL-MIDDLE-GRIP -TB W/L

2ton

AL-LARGE-GRIP -TB W/L

AL-MIDDLE-GRIP -LTB W/L



AL-MIDDLE-GRIP-LTB W/L

AL-MIDDLE-GRIP-TB W/L

AL-LARGE-GRIP-TB W/L

“Thumb” Type



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
AL-MIDDLE-GRIP-TB W/L	51087	20kN/2.0ton	5mm	25mm	32mm	2.3kg
AL-LARGE-GRIP-TB W/L	51085	20kN/2.0ton	16mm	32mm	32mm	2.3kg
AL-MIDDLE-GRIP-LTB W/L	51092	20kN/2.0ton	5mm	25mm	32mm	2.9kg

## FOR BARE ALUMINUM CABLE

AL-3TON-GRIP W/L

3ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
AL-3TON-GRIP W/L	51050	30kN/3.0ton	8mm	22mm	35mm	3.0kg

AL-4TON-GRIP W/L


4ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
AL-4TON-GRIP W/L	51039	40kN/4.0ton	20mm	35mm	35mm	3.7kg
AL-4TON-GRIP-L W/L	51077A	40kN/4.0ton	20mm	35mm	35mm	4.1kg

AL-6TON-GRIP W/L


6ton

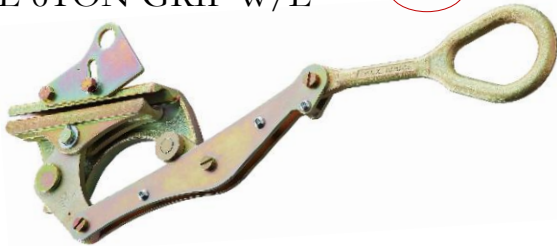

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
AL-6TON-GRIP W/L	51088	60kN/6.0ton	25mm	40mm	66mm	8.8kg

AL-9TON-GRIP W/L


9ton

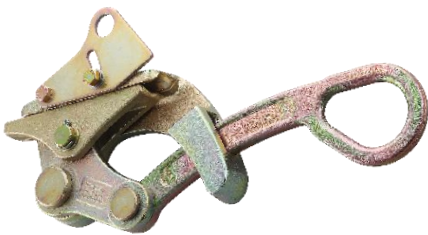

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
AL-9TON-GRIP W/L	51108	90kN/9.0ton	18mm	32mm	66mm	9.6kg

AL-10TON-GRIP W/L

10ton

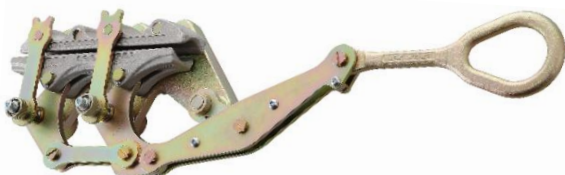

Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
AL-10TON-GRIP W/L TYPE1	51080	100kN/10.0ton	32mm	46mm	66mm	14kg
AL-10TON-GRIP W/L TYPE2	51082	100kN/10.0ton	42mm	52mm	66mm	14kg

## FOR ABC CABLE

ABC-GRIP W/L

0.6ton

0.85ton

2ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
ABC-GRIP-S W/L	51093	6kN/0.6ton	2 x 16mm <sup>2</sup>	4 x 35mm <sup>2</sup>	32mm	1.8kg
ABC-GRIP W/L	51049	8.5kN/0.85ton	4 x 35mm <sup>2</sup>	4 x 95mm <sup>2</sup>	35mm	3.3kg
ABC-GRIP-L W/L	51094	20kN/2.0ton	4 x 95mm <sup>2</sup>	4 x 150mm <sup>2</sup>	36mm	3.3kg

DV-GRIP

0.3ton

: FOR SERVICE CABLE, DV CABLE, ABC CABLE



Model	Item Code	Safe Working Load	Cable Size		Weight
			Min.	Max.	
DV-GRIP	51084	3kN/0.3ton	3 x 38sq	3 x 100sq	200g

## FOR HOT LINE WORK

HOT-GRIP W/L

2ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min.	Max.		
HOT-S-GRIP W/L	51036	20kN/2.0ton	5mm	16mm	32mm	1.7kg
HOT-M-GRIP W/L	51037	20kN/2.0ton	5mm	25mm	32mm	2.1kg
HOT-L-GRIP W/L	51038	20kN/2.0ton	16mm	32mm	32mm	2.1kg

# FOR TROLLEY CABLE

TROLLEY GRIP W/L  
TYPE-1

2ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
TROLLEY GRIP W/L TYPE-1	51083A	20kN/2.0ton	5mm	16mm	32mm	2.3kg

TROLLEY GRIP W/L  
TYPE-2

2ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
TROLLEY GRIP W/L TYPE-2	51019A	20kN/2.0ton	8mm	20mm	25mm	3.4kg

TROLLEY GRIP W/L  
TYPE-3

3ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
TROLLEY GRIP W/L TYPE-3	51100	30kN/3.0ton	8mm	22mm	35mm	3.4kg

TROLLEY GRIP W/L  
TYPE-4

4ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
TROLLEY GRIP W/L TYPE-4	51101	40kN/4.0ton	13mm	28mm	25mm	5.2kg

TROLLEY GRIP W/L  
TYPE-4  
LARGE EYE

4ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
TROLLEY GRIP W/L TYPE-4	51101A	40kN/4.0ton	13mm	28mm	50mm	5.2kg

TROLLEY GRIP W/L  
TYPE-6

6ton



Model	Item Code	Safe Working Load	Cable Dia.		Eye Size	Weight
			Min	Max.		
TROLLEY GRIP W/L TYPE-6	51102	60kN/6.0ton	16mm	28mm	25mm	5.6kg

# RATCHET PULLERS

Only for horizontal pulling (Not for lifting)

## BELT TYPE

Rotates full 360°

FRP Handle

MODEL N-500 (Single Belt)

MODEL N-1000 (W/H)

MODEL N-1500 (W/H)

0.5 ton 1.0 ton 1.5 ton



Option safety hook (W/H)



Model	Item Code	Safe Working Load	Strap Size	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL N-500	52008	5kN (0.5ton)	2 x 33mm	Please contact us for further information			
MODEL N-1000	52009	10kN (1.0ton)	2 x 33mm	420mm	1270mm	400mm	3.2kg
MODEL N-1000 W/H	52009S	10kN (1.0ton)	2 x 33mm	420mm	1270mm	400mm	3.2kg
MODEL N-1500	52010	15kN (1.5ton)	2 x 40mm	450mm	1300mm	480mm	4.5kg
MODEL N-1500 W/H	52010S	15kN (1.5ton)	2 x 40mm	450mm	1300mm	480mm	4.5kg

MODEL N-1000P (W/H)

MODEL N-1500P (W/H)

1ton 1.5 ton



Option safety hook (W/H)




Model	Item Code	Safe Working Load	Strap Size	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL N-1000P	52011	10kN (1.0ton)	2 x 33mm	440mm	1940mm	400mm	3.3kg
MODEL N-1000P W/H	52011S	10kN (1.0ton)	2 x 33mm	440mm	1940mm	400mm	3.3kg
MODEL N-1500P	52012	15kN (1.5ton)	2 x 40mm	470mm	1970mm	480mm	4.6kg
MODEL N-1500P W/H	52012S	15kN (1.5ton)	2 x 40mm	470mm	1970mm	480mm	4.6kg

MODEL N-1500P-EX (W/H)

MODEL N-1500P-EX-H

1.5 ton

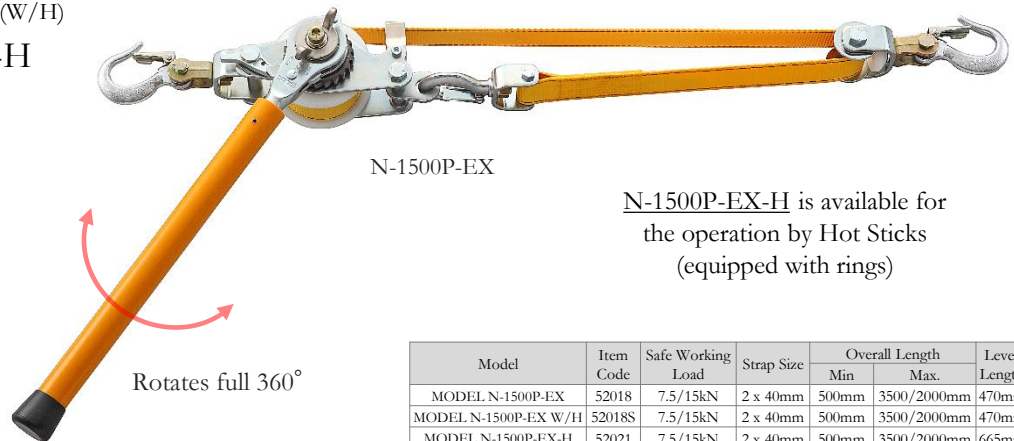

N-1500P-EX-H is available for the operation by Hot Sticks (equipped with rings)

Option safety hook (W/H)



Model	Item Code	Safe Working Load	Strap Size	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL N-1500P-EX	52018	7.5/15kN	2 x 40mm	500mm	3500/2000mm	470mm	4.5kg
MODEL N-1500P-EX W/H	52018S	7.5/15kN	2 x 40mm	500mm	3500/2000mm	470mm	4.5kg
MODEL N-1500P-EX-H	52021	7.5/15kN	2 x 40mm	500mm	3500/2000mm	665mm	4.5kg

MODEL N-1500P-EX2

Convertible with 3 hooks

1.5 ton




Model	Item Code	Safe Working Load	Strap Size	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL N-1500P-EX2	52033	7.5/15kN	2 x 40mm	460mm	3500/2000mm	550mm	5.7kg

# WIRE TYPE

Rotates full 360°

## MODEL 500

0.5 ton

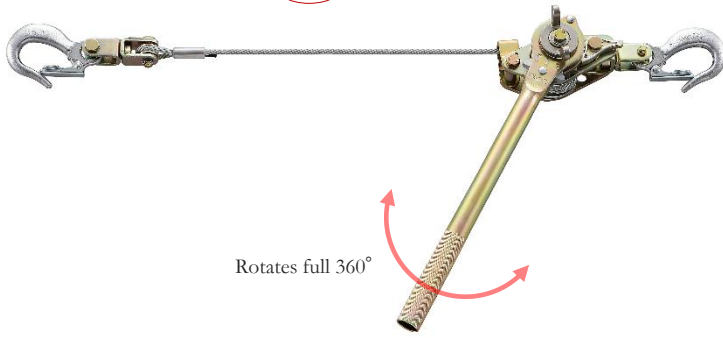


Rotates full 360°

Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 500	52001	5kN (0.5ton)	5.0mm	360mm	1370mm	330mm	2.4kg

## MODEL 1000 (W/H)

1ton

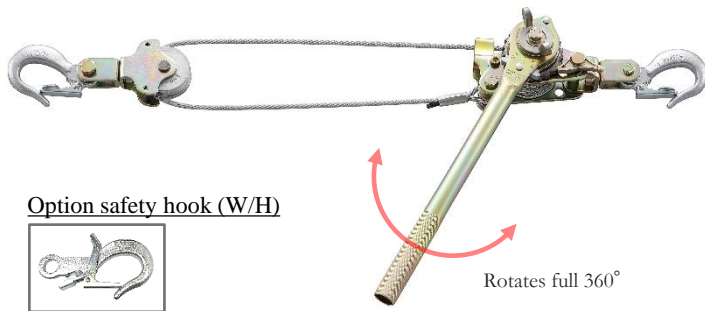

Rotates full 360°


Option safety hook (W/H)



Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 1000	52002	10kN (1.0ton)	5.0mm	410mm	1210mm	330mm	3.1kg
MODEL 1000 W/H	52002S	10kN (1.0ton)	5.0mm	410mm	1210mm	330mm	3.1kg

## MODEL 1500 (W/H)

1.5 ton

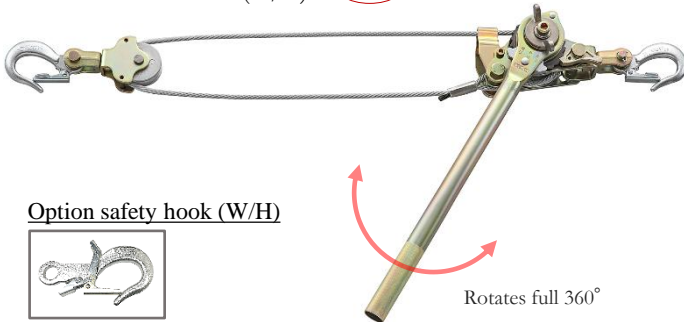

Rotates full 360°

Option safety hook (W/H)




Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 1500	52003	15kN (1.5ton)	6.3mm	450mm	1220mm	430mm	4.3kg
MODEL 1500 W/H	52003S	15kN (1.5ton)	6.3mm	450mm	1220mm	430mm	4.3kg

## MODEL P-1500-C

1.5 ton

Convertible with 3 hooks

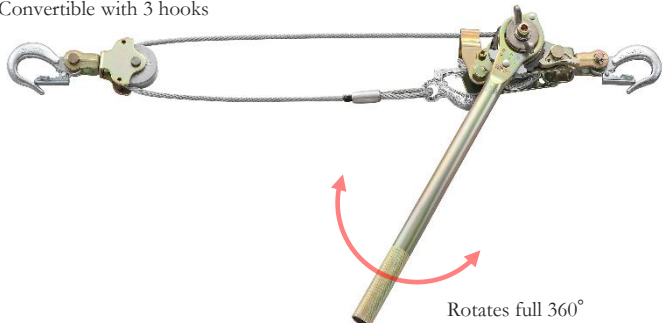


Rotates full 360°

Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL P-1500-C	52005	7.5/15kN	5.0mm	460mm	3280/1870mm	430mm	4.3kg

## MODEL P-1500-EX (W/H)

1.5 ton

## MODEL P-1500-EXR

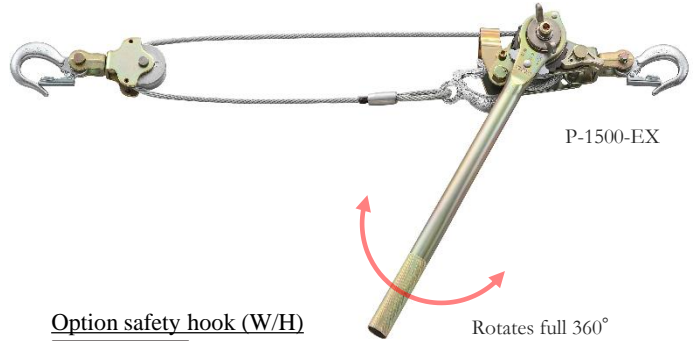

P-1500-EX

Rotates full 360°

Option safety hook (W/H)




P-1500-EXR is equipped with self-exchangeable 3<sup>rd</sup> hook.

Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL P-1500-EX	52015	7.5/15kN	5.0mm	500mm	6500/3500mm	430mm	5.0kg
MODEL P-1500-EX W/H	52015S	7.5/15kN	5.0mm	500mm	6500/3500mm	430mm	5.0kg
MODEL P-1500-EXR	52029	7.5/15kN	5.0mm	500mm	6500/3500mm	430mm	5.0kg

## MODEL P-2000

2ton

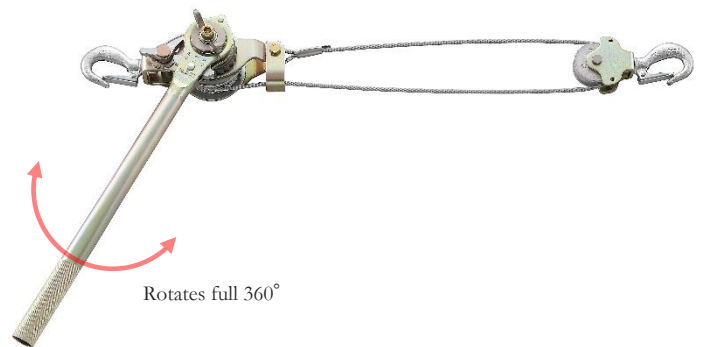


Rotates full 360°

Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL P-2000	52016	20kN (2.0ton)	5.0mm	460mm	1870mm	430mm	4.1kg

## MODEL 2000

2ton

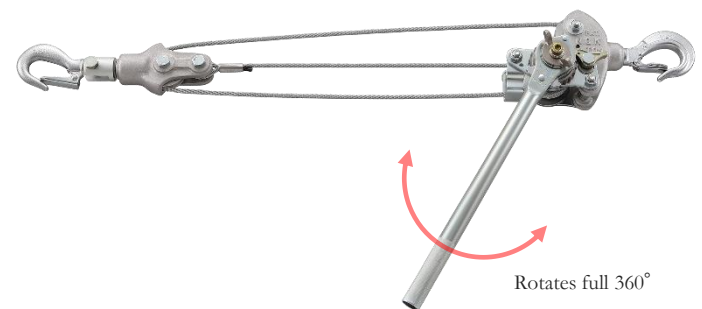

Rotates full 360°

Model	Item Code	Safe Working Load	Wire Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 2000	52006	20kN (2.0ton)	6.3mm	500mm	1260mm	430mm	6.0kg

# CHAIN TYPE

Rotates full 360°

## MODEL RICKY-2

0.75 ton



Rotates full 360°

3.0m: 52022D, 5m: 52022G

Model	Item Code	Safe Working Load	Chain Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
RICKY-2/1.5m	52022A	7.5kN (0.75ton)	5.0mm	300mm	1800mm	240mm	4.0kg

## MODEL 3000

3ton



Rotates full 360°

3.0m: 52007D, 5m: 52007G

Model	Item Code	Safe Working Load	Chain Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 3000/1.5m	52007A	30kN (3.0ton)	5.0mm	480mm	2000mm	430mm	8.0kg

## MODEL RICKY-3

1.5 ton



Rotates full 360°

3.0m: 52023D, 5m: 52023G

Model	Item Code	Safe Working Load	Chain Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
RICKY-3/1.5m	52023A	15kN (1.5ton)	5.0mm	350mm	1850mm	240mm	5.0kg

## MODEL 4000

4ton



Rotates full 360°

3.0m: 52025D, 5m: 52025G

Model	Item Code	Safe Working Load	Chain Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 4000/1.5m	52025A	40kN (4.0ton)	5.0mm	580mm	2180mm	430mm	12.0kg

## MODEL 2000A & 2000C Torque Handle

2ton



MODEL 2000A

Rotates full 360°

Model	Item Code	Safe Working Load	Chain Dia.	Length		Lever Length	Weight
				Min	Max.		
MODEL 2000A/1.5m	52034	20kN (2.0ton)	5.0mm	350mm	1850mm	315mm	6.6kg
MODEL 2000C/1.5m	52036	20kN (2.0ton)	5.0mm	350mm	1850mm	315mm	6.6kg

## MODEL 4000H

4ton



Rotates full 360°

3.0m: 52027D, 5m: 52027G

Model	Item Code	Safe Working Load	Chain Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 4000H/1.5m	52027A	40kN (4.0ton)	5.0mm	580mm	2180mm	430mm	12.0kg

## MODEL 2000B & 2000D

2ton



MODEL 2000B

Rotates full 360°

Model	Item Code	Safe Working Load	Chain Dia.	Length		Lever Length	Weight
				Min	Max.		
MODEL 2000B/1.5m	52035	20kN (2.0ton)	5.0mm	350mm	1850mm	240mm	6.6kg
MODEL 2000D/1.5m	52037	20kN (2.0ton)	5.0mm	350mm	1850mm	240mm	6.6kg

## MODEL 6000

6ton



Rotates full 360°

3.0m: 52026D, 5m: 52026G

Model	Item Code	Safe Working Load	Chain Dia.	Overall Length		Lever Length	Weight
				Min	Max.		
MODEL 6000/1.5m	52026A	60kN (6.0ton)	5.0mm	650mm	2250mm	430mm	19.0kg

# TENSION METER

## ANALOG TYPE

AS-1 (1kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-1	50101N	1kN	20N	125mm	65mm	20mm	0.6kg

AS-3 (3kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-3	50108N	3kN	50N	145mm	65mm	16mm	0.8kg

AS-5 (5kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-5	50102N	5kN	100N	150mm	65mm	16mm	0.8kg

AS-10 (10kN)



AS-10L (10kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-10	50103N	10kN	200N	135mm	65mm	16mm	0.8kg
AS-10L	50103NL	10kN	200N	215mm	65mm	28mm	1.2kg

AS-20 (20kN)



AS-20L (20kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-20	50104N	20kN	500N	160mm	65mm	16mm	1.2kg
AS-20L	50104NL	20kN	500N	230mm	65mm	28mm	1.6kg

AS-30 (30kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-30	50105N	30kN	500N	250mm	80mm	28mm	2.2kg

AS-50 (50kN)



Come with a leather case


Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-50	50106N	50kN	1kN	260mm	95mm	28mm	3.3kg

AS-100 (100kN)



Come with a leather case

Model	Item Code	Capacity	Graduation	Size			Weight
				A	B	C	
AS-100	50107N	100kN	2kN	360mm	100mm	38mm	7.2kg

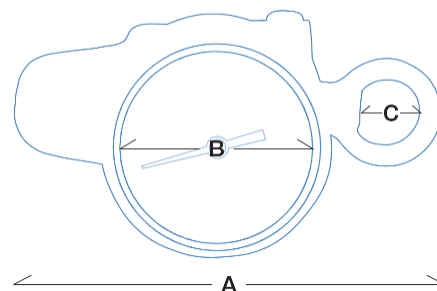

SIZE A ~ C Layout Drawing  
 A --- Entire length  
 B --- Display  
 C --- Inner dia. of eye

# OTHER PRODUCT

## HOIST

### MINI PULLER



Model	Item Code	Safe Working Load	Overall Length		Lever Length	Weight
			Min	Max.		
MINI PULLER/1.1m	52013A	7.5kN (0.75ton)	Please contact us for further information			

## CABLE CUTTER

### MIGHTY CUTTER



Model	Item Code	Overall Length				Lever Length	Jaw Opening	Overall Length	Weight
		ACSR	HAL	Cu	St				
MIGHTY CUTTER FRP	54051	160mm2	400mm2	150mm2	45mm2	430mm	32mm	600mm	2.7kg
MIGHTY CUTTER AL	54052	160mm2	400mm2	150mm2	45mm2	430mm	32mm	600mm	2.5kg

## RATCHET WRENCH



14mm Socket



54071A 54060A

Model	Item Code	Socket Size (mm)				Length	Weight
B-3	54065	10mm	13mm	17mm	19mm	240mm	600g
BS-3	54060	17mm	19mm	21/22mm	24mm	270mm	700g
BY-3	54061	17mm	19mm	21/24mm	30mm	280mm	900g
BR-5	54068	17mm	19mm	22mm	24mm	270mm	700g
BK-3	54069	19mm	21/22mm	24mm	30mm	280mm	700g
BM-3	54070	10mm	14mm	17mm	19mm	270mm	600g
GK-3	54071	17mm	19mm	21mm	24mm	270mm	600g
Socket 14mm	54060A	Only fits 17mm of BS-3					105g
Socket 14mm	54071A	Fits for 17mm of GK-3, BS-3					60g

## MARKING TORQUE

Auto marking at the setting torque with click sound.



Model	Item Code	Preset torque	Length	Weight
M10 (17mm)	55030	46N·m	320mm	860g
M12 (19mm)	52031	50N·m		

## CABLE PEELER



Model	Item Code	Cable Size	Weight
70 & 150	55034	70sq, 150sq	1.0kg
150 & 240	52035	150sq, 240sq	1.0kg
477MCM & AWG#2	55056	477MCM & AWG#2	1.0kg

## CABLE STRIPPER



Model	Item Code	Cable Size	Weight
Stripper150	55036	150sq	700g



<http://www.ngk-nagaki.com/>

# NAGAKI



Overseas Department  
Line Build. Minami Semba 9F, 1-10-12,  
Minami Semba, Chuo-ku, Osaka City,  
Osaka 542-0081, Japan  
Phone: +81-6-6484-5418

**NAGAKI** 